SCHMITZ CARGOBULL

The Trailer Company.

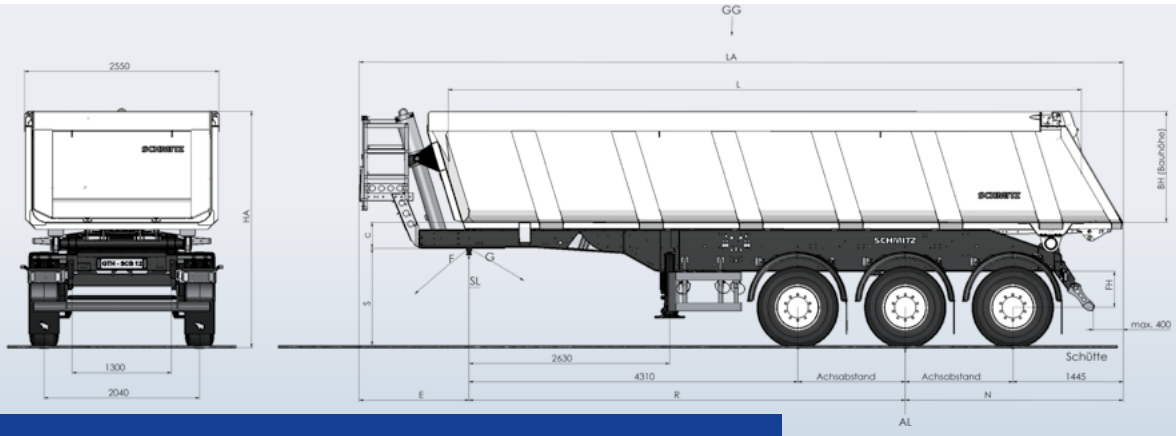

S.KI Heavy

S.KI 24 3AT HD 8.2 SK

3-axle rear tipper semitrailer with steel body for 3-axle semitrailer tractors

Weights				**technically**
Gross weight	GG	kg		45.000
Aggregate load	AL	kg		27.000
Semitrailer weight	SL	kg		18.000
Tyres				385/65 R 22,5"
Measurements			**loaded**	**unloaded**
Semitrailer height - minimum recommended to max. permissible	S	mm	1.270 - 1.370	1.300 - 1.400
Semitrailer height - semitrailer horizontal	S	mm	1.270	1.300
Axle distance		mm		**1.410**
Wheelbase	R	mm		5.720
Rear overhang with chute	N	mm		2.855
Body height	BH	mm	**1.360**	**1.450**
Loading volume with chute	V	m^3	26,4	28,2
Overall height unloaded horizontal without tarpaulin	HA	mm	3.150	3.150
Overall height unloaded horizontal with rollup tarpaulin	HA	mm	3.150	3.210
Overall height unloaded tipped without tarpaulin	HK	mm	9.100	9.100
Overall height unloaded tipped with rollup tarpaulin	HK	mm	9.100	9.100
Pivoting radius front only body	F	mm	1.365	1.375
Pivoting radius front with rollup tarpaulin and platform	F	mm	1.735	1.735
Pivoting radius rear as par ISO 1726	G	mm	2.590	2.590
Internal length with chute	L	mm	8.300	8.300
Front overhang only body	E	mm	1.020	1.020
Front overhang with rollup tarpaulin and platform	E	mm	1.440	1.440
Maximum tipping angle		°	50,5	50,5
Body height from trailer coupling to body floor	C	mm	340	340
Distance from centre of rear axle to body/chute at rear		mm	1.445	1.445
Rear edge of underride guard to rear edge of well		mm	max. 400	max. 400

We reserve the right to make technical and design changes.
S.KI-SOLID-TDS-DEGB-6440-3314

Schmitz Cargobull (UK) Ltd. · North Road · Harelaw, Stanley · GB-Co. Durham DH9 8HJ
Phone: 01207 282882 · Fax: 01207 232479 · E-mail : info.uk@cargobull.com · www.cargobull.com/uk